

## Socket model ES 15/4G

**ES154GCNER** - Pack. 10/150 pcs

Relay socket model ES 15/4G for industrial relay with 4 PDT, 1/3 level, spring-cage connections, connection facility for input interference suppression modules.


Rated voltage	300 VAC
Rated current	10 A
Dielectric strength adjacent contact circuits	2500V
Dielectric strength coil contact circuits	2500V

### Connection data

Conductor cross section solid and stranded	min. 0,5 mm <sup>2</sup> two wires for terminal
Conductor cross section solid and stranded	max. 1,5 mm <sup>2</sup> two wires for terminal
Conductor cross section AWG	min. 20
Conductor cross section AWG	max 16
Stripping length	10 mm

### General data

Width	31 mm
Height	95 mm
Color	Black
Ambient temperature (operation)	-25 °C ... 85 °C

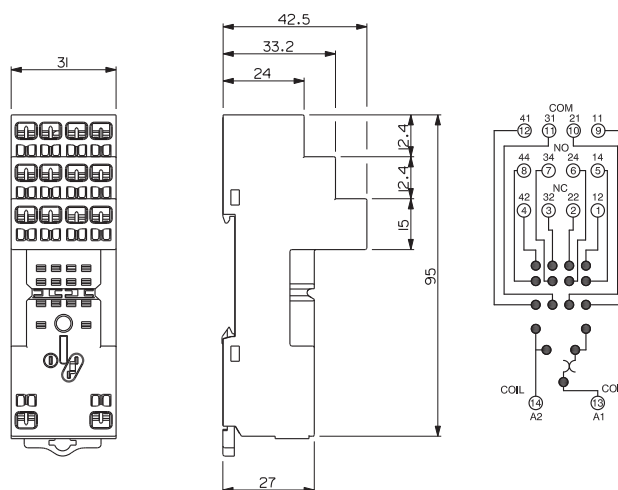

## Accessories



### Model MH 35 MH35 - Pack. 10/1000 pcs

Spring for relay securing  
Material: X Cr Ni Steel  
Relay height: 33,5-35,5 mm

### Model MH 30 MH30 - Pack. 100/1000 pcs

Spring for relay securing  
Material: X Cr Ni Steel  
Relay height: 28-30 mm



### Model TR TR - Pack. 10/1000 pcs

Plate for ES50, ES35, ES32, ES25, ES50/3G, ES50/3S, ES35/3S, ES15/4-2B, ES15/4-2G



### Model MS 30 B MS30B - Pack. 10/100 pcs

Spring for relay securing and releasing  
Material: Thermoplastic  
Relay height: 28-30 mm



### Model MS 30 C MS30C - Pack. 10/100 pcs

Spring for relay securing and releasing  
Material: Thermoplastic  
Relay height: 28-30 mm



### Model MS 35 B MS35B - Pack. 10/100 pcs

Spring for relay securing and releasing  
Material: Thermoplastic  
Relay height: 33,5-35,5 mm



### Model MS 35 C MS35C - Pack. 10/100 pcs

Spring for relay securing and releasing  
Material: Thermoplastic  
Relay height: 33,5-35,5 mm